


CLEANING AGENT (EDGE-BANDING)

Application: Applied via an automatic spray nozzle system before the buffing wheels or surface scraper to remove adhesive residues and processing agents. It improves the surface finish of the edgeband and panel while providing a cooling effect on the edgeband and glue line.

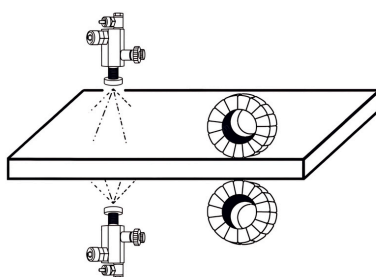

Specification:

Color	Yellowish
Supply form	Liquid
Density (at 20°C)	0.8 g/cm ³
Application temperature	15 - 35°C

Packaging & Storage: in 25L plastic pails.

Shelf life of 24 months, in original package, cool and dry.

Remarks: All data indicated are characteristics represented as average values. Our technical data sheets are revised to represent the latest information. This edition is valid on the date of compilation.

TIANJIN SHENG-WANG ELECTRONIC
CHEMICAL PLANT


E-mail: sales@swadhesive.com

www.swhotmeltglue.com

FREE BIRD®
Adhesives

SEPERATING AGENT (EDGE-BANDING)

Application: Applied via the spray nozzle system to the top and bottom surfaces of the panel before the trimming unit. Forms a temporary protective film that prevents adhesive squeeze-out from adhering to the panel surface.

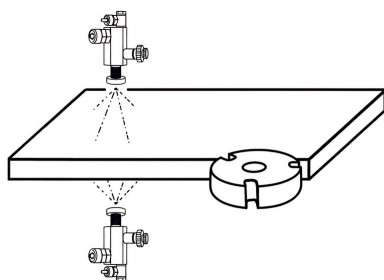

Specification:

Color	Light blue
Supply form	Liquid
Density (at 20°C)	0.8 g/cm ³
Application temperature	15 - 35°C

Packaging & Storage: in 25L plastic pails.

Shelf life of 24 months, in original package, cool and dry.

Remarks: All data indicated are characteristics represented as average values. Our technical data sheets are revised to represent the latest information. This edition is valid on the date of compilation.

TIANJIN SHENG-WANG ELECTRONIC
CHEMICAL PLANT

E-mail: sales@swadhesive.com

www.swhotmeltglue.com

FREE BIRD 
Adhesives